

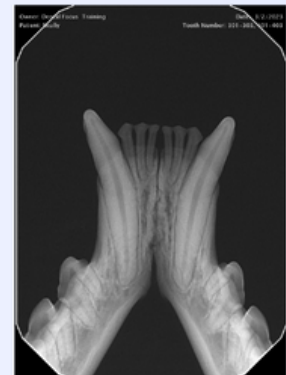


MOST DURABLE SENSOR ON THE MARKET

❃ UNMATCHED TECHNICAL SUPPORT ❃

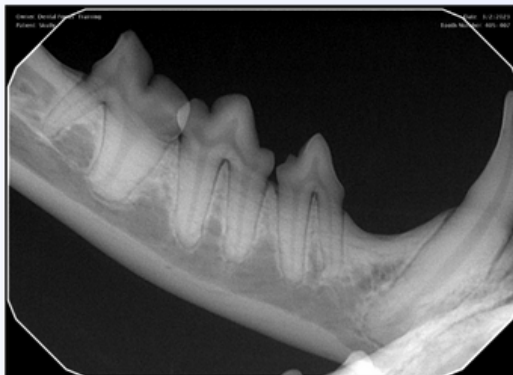


HIGH-RESOLUTION DIAGNOSTIC IMAGES

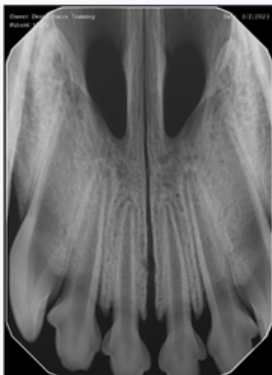


DF-PS2 SPECIFICATIONS

| | |
|--------------------------|-----------------------------|
| Technology | CMOS |
| Pixel Size | 19.5µm x 19.5µm |
| True Measured Resolution | >20 lp/mm |
| Theoretical Resolution | >26 lp/mm |
| Gray Scale | 14 bits; 16,384 gray levels |
| Connection | High-speed 2.0 USB |
| Cable Length | 9ft |
| Dynamic Range | 75dB |
| Operating System | Windows 10 (64-bit) |
| Image Delivery System | 5 seconds |
| Software | Image Calibration Files |
| Size 1 Active Area | 30.01mm x 20.01mm |
| Size 2 Active Area | 35.92mm x 25.82mm |
| Manufacturer's Warranty | 2 Years |

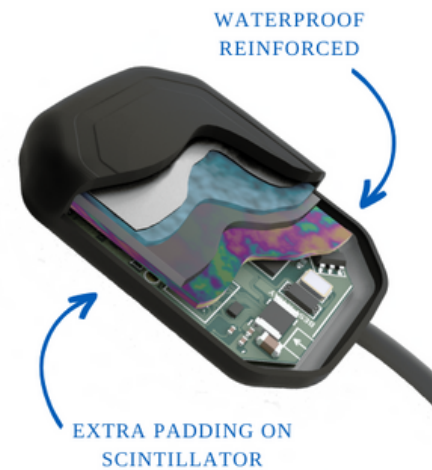

PS-2 Size 1 Dimensions (Millimeters)

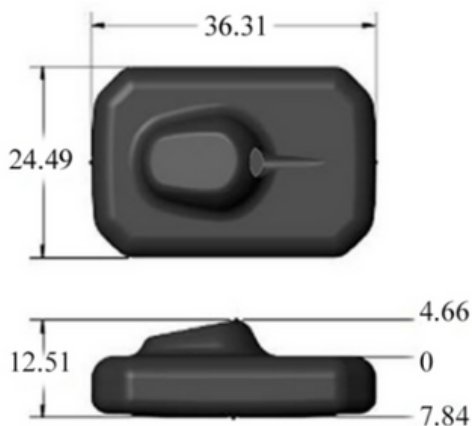

PS-2 Size 2 Dimensions (Millimeters)

